

动力电池包包体 气密性检测专用仪器

Designed for testing xEV traction battery
pack airtightness




AE3530

AE3530

PORTABLE LOW PRESSURE AIR LEAK TESTER
便携式低压气密性检测仪

方便携带、自带气泵，无需外接气源

Portable, Airpump integrated

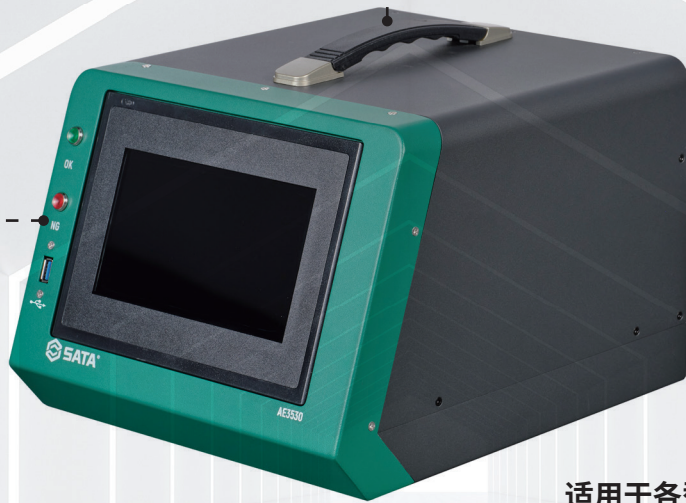

适用于各型动力电池包外壳的泄漏检测
(需配套专用工装堵头)

Support any kind of EV pack leak test
(plug fixture&leak kit)

一键测试：全自动控制，自动调压，结束自动显示结果

One-key-start: fully automation, no need additional procedure during the test

性能参数 PARAMETER

供电电压 Supply Voltage	功耗 Power	测试压范围 Test Pressure Range	泄漏量显示 Leakage Indication	测试精度 Test Accuracy
交流 176-264V, 频率 50/60hz Ac 176-264V, frequency 50/60hz	40w	1000-9500 Pa	0-9999 Pa	±0.5%FS
测试参数 Parameter Setting	升级方式 Upgrade Mode	工作环境温湿度 Operating Temperature, Humidity	外形尺寸 Dimension	重量 Weight
参数可自定义编辑 / 增加 / 导入导出 / 删减等 Parameters can be customized to edit/add/import/export/delete	本地 U 盘升级 (远程升级需定制) Local USB flash drive upgrade	使用温度为 0-40°C。80%HR 以下，无结露 The operating temperature is 0-40°C . 80%HR , no condensation	337*270*207 mm	5.7kg